



DATASHEET:

HA-HFL

HELIPORT FLOODLIGHT

HA-HFL Heliport Floodlight. Complete with anti-glare shield and frangible mount.

ENCLOSURE

Body: Aluminium
 Anti-glare Shield: Stainless Steel
 Reflector: Aluminium
 Cover: Safety glass

DIMENSIONS

405x210x240 mm

WEIGHT

3,5 Kg

CABLE GLAND

Standard: 1x M20 cable gland

LIGHT SOURCE

R7s halogen lamp

POWER CONSUMPTION

400 Watt

LIGHT COLOUR

2900K

EXPECTED LIFETIME

2000 hours (lamp life)

POWER SUPPLY

230 VAC or 50/60 Hz

LIGHT OUTPUT


8750 lm

INGRESS PROTECTION


IP 54

COMPLIANCES

ICAO Annex 14 Vol. II Heliports
 EASA ADR

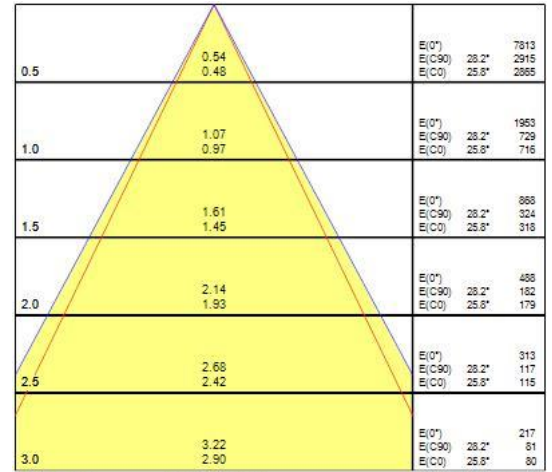

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 51.6°)
 — C90 - C270 (Half beam angle: 56.4°)

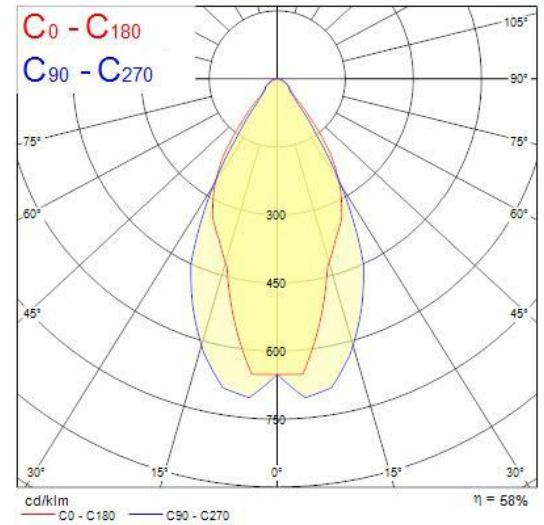

Holland Aviation
 Daniëlsweg 40
 4451 HW Heinkenszand
 The Netherlands

Tel. +31 (0)113 613467
 Fax. +31 (0)113 613570
 Email: info@hollandaviation.com
www.hollandaviation.com

