Holland Aviation b.v.

Airport and heliport, lighting and equipment, windsock assemblies

HA-ILD LS 180 SUPER FLAT

OMNIDIRECTIONAL INSET LIGHT LED TECHNOLOGY

HA-ILD LS 180 Super Flat Omnidirectional Helipad Light

For direct installation onto the helideck or helipad

ENCLOSURE	Aluminium, chromated and hot baked powder coated. Sealed for life
LENS	Borosilicate glass, roll over type
CABLE ENTRY	5mm with 1,5m cable
LIGHT SOURCE	High power LED green (White, blue, yellow or red also available on request)
POWER CONSUMPTION	4x 3 watt
EXPECTED LIFETIME	>75.000 hours
POWER SUPPLY	90-255 VAC additional controller converts to low voltage current (9-36 VDC)
LIGHT OUTPUT	>32,5 cd
AMBIENT TEMPERATURE	-40 °C to + 60 °C
INGRESS PROTECTION	IP 67
MOUNTING SIZE	200 mm diameter, height 25mm
WEIGHT	950 gr
COMPLIANCES	ICAO Annex 14 Vol. II UK CAP 437 IMO 2009 MODU CODE Safe area ATEX zone 2 EASA ADR

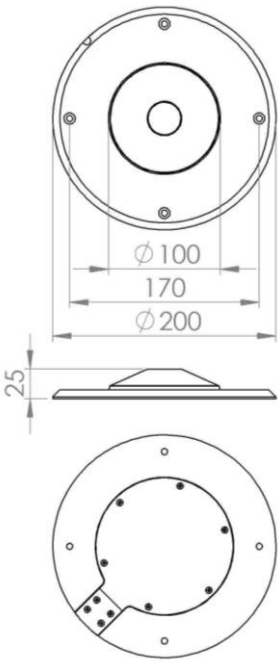

Holland Aviation
Daniëlsweg 40
4451 HW Heinkenszand
The Netherlands

Tel. +31 (0)113 613467
Fax. +31 (0)113 613570
Email: **info@hollandaviation.com**
www.hollandaviation.com

ISO 9001

©Holland Aviation. The information contained in this document is subject to modifications without prior notice.