




OMNIDIRECTIONAL INSET LIGHT LED TECHNOLOGY

For direct installation onto the helideck

ENCLOSURE	Aluminium body, chromate conversion and powder coating. Sealed for life
DIMENSIONS	Ø180 x 78 mm (only 25mm above deck)
WEIGHT	1,5 Kg
LENS	Borosilicate glass, roll over type
CABLE	Standard: 1x M20 cable gland with 1,5m cable
LIGHT SOURCE	High power LED Green (White, Blue, Yellow or Red also available on request)
POWER CONSUMPTION	5 watt
EXPECTED LIFETIME	>75.000 hours
POWER SUPPLY	90-255VAC or 9-36 V AC/DC (optional)
LIGHT OUTPUT	>32 cd
AMBIENT TEMPERATURE	-40 °C to + 60 °C
INGRESS PROTECTION	IP 67
COMPLIANCES	ICAO Annex 14 Vol. II UK CAP 437 IMO 2009 MODU CODE EASA ADR

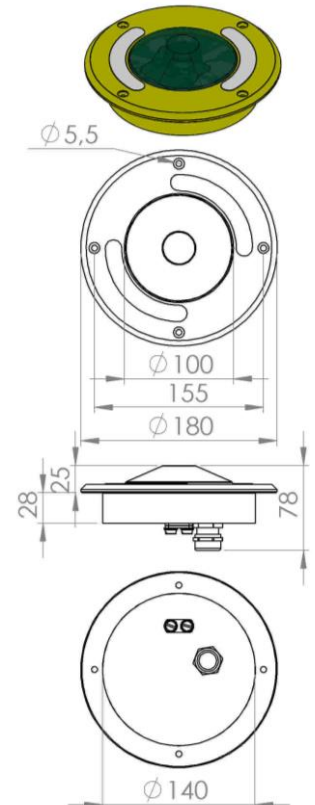

Holland Aviation
Daniëlsweg 40
4451 HW Heinkenszand
The Netherlands

Tel. +31 (0)113 613467
Fax. +31 (0)113 613570
Email: info@hollandaviation.com
www.hollandaviation.com

