



Holland Aviation b.v.

Airport and heliport, lighting and equipment, windsock assemblies

DATASHEET:

HA-HBS

HELIPORT BEACON SYSTEM

Clear white heliport beacon light. Suitable as a long-range visual guidance and/or heliport identification lighting. A heliport should be provided with a beacon light when visual guidance is not provided by other visual means or when identification of the heliport is difficult due to surrounding light.

ENCLOSURE LIGHT

Aluminium body, colour: yellow RAL 1021, chromate conversion and powder coating

DIMENSIONS LIGHT

266x160x190 mm

LENSE

133mm Borosilicate glass tempered

ENCLOSURE CONTROLLER

Steel powder coated grey RAL7035

DIMENSIONS CONTROLLER

400x300x170 mm

POWER CONSUMPTION

Max. 100 Watt

POWER SUPPLY

95-255 VAC

LIGHT SOURCE

High Brightness LED's

LIGHT OUTPUT

2500 Cd +/- 10%

LIGHT OUTPUT CONTROL

100%, 10% and 3%

EXPECTED LIFETIME

>50.000 hours

FLASH RATE

30 FPM in the format of Morse code letter H. Other rates available on request

CABLE GLAND

4x M20 standard

CABLE

Max 50m

AMBIENT TEMPERATURE

-40 °C to + 50 °C

INGRESS PROTECTION

light: IP66; Controller unit: IP66

COMPLIANCES

ICAO Annex 14 Vol. II


UK CAA CAP 437

Atex zone 2 & Safe zone

EASA ADR

HS CODE (CUSTOMS TARIFF)

94054031

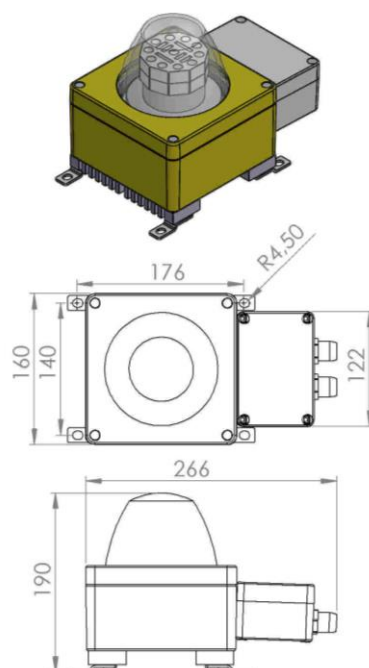

Holland Aviation
Daniëlsweg 40
4451 HW Heinkenszand
The Netherlands

Tel. +31 (0)113 613467
Fax. +31 (0)113 613570
Email: info@hollandaviation.com
www.hollandaviation.com



© Holland Aviation. The information contained in this document is subject to modifications without prior notice