



DATASHEET:

## HA-L806 EXEL

### FRANGIBLE 'CLOSE TO RUNWAY' AIRPORT WINDSOCK ASSEMBLY

The HA-L806 EXEL is a reliable wind direction and wind speed indication. The reliable illumination system (if present) is fixed and therefore has no rotating electric parts or slip-rings. Due to its unique design maintenance cost and power consumption are low. The hinged base enables easy replacement of the windsock.

COLOURS	FAA-orange and ICAO-red/white
WINDSOCK SIZE	Ø45x250cm
WINDSOCK MATERIAL	Polyester, PU coated, approx. 185 gr/m <sup>2</sup>
WINDSOCK FRAME MATERIAL	Stainless steel AISI 316L
SWIVEL HEAD	2 heavy duty sealed stainless steel bearings
MAST LENGHT	1500mm EXEL mast
MAST MATERIAL	EXEL mast: Glass Fiber Composite Top and light: T50 aluminium
FOUNDATION BASE	Galvanised steel
LIGHTING STYLES	Unlighted, externally lighted, internally lighted
POWER SUPPLY	90-240VAC or 6,6A
POWER CONSUMPTION	Internal Lighting: 12 Watt External Lighting: 40 Watt Obstruction Light: 5 Watt
INGRESS PROTECTION	IP65
AMBIENT TEMPERATURE	-40°C to +60°C
COMPLIANCES	ICAO Annex 14 Vol. I Aerodromes ICAO Annex 14 Vol. II Heliports FAA AC150/5345-27 UK CAA CAP 168 and CAP 437 EASA ADR
HS CODE (CUSTOMS TARIFF)	9015802000




Holland Aviation  
Daniëlsweg 40  
4451 HW Heinkenszand  
The Netherlands

Tel. +31 (0)113 613467  
Fax. +31 (0)113 613570  
Email: [info@hollandaviation.com](mailto:info@hollandaviation.com)  
[www.hollandaviation.com](http://www.hollandaviation.com)





## DIMENSIONS

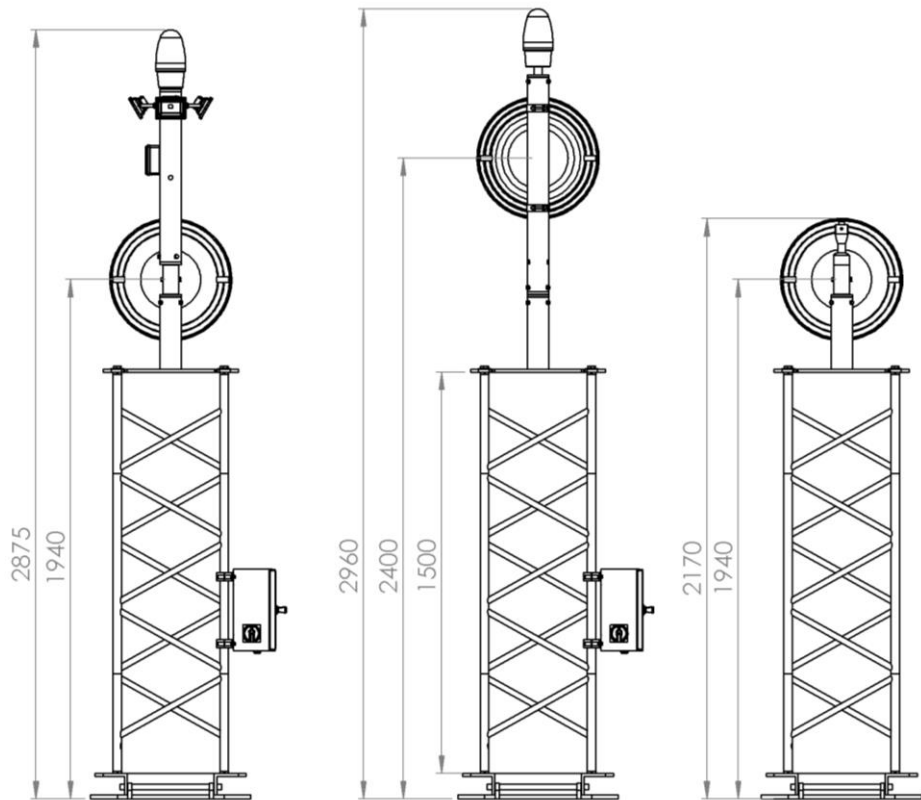

Style I-A: Externally Lighted

Style I-B: Internally Lighted

Style II: Unlighted

Holland Aviation  
Daniëlsweg 40  
4451 HW Heinkenszand  
The Netherlands

Tel. +31 (0)113 613467  
Fax. +31 (0)113 613570  
Email: [info@hollandaviation.com](mailto:info@hollandaviation.com)  
[www.hollandaviation.com](http://www.hollandaviation.com)

